

Steatite Cube

PURE SQUARE DESIGN WATER HEATER EQUIPPED WITH STEATITE DRY HEATING ELEMENT



+ PRODUCT

COMFORT

- Easy to maintain: Heating element removable without draining the tank
- Pure square design to better fit in all interiors
- Intuitive control panel with quick mode selection knob

QUALITY - DURABILITY

- Steatite technology: Ceramic dry heating element adapted to aggressive, hard or desalinated water
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS


- Control panel with heating light indicator
- Absence mode with anti-frost protection
- Easy installation with wall-mounting plates and drilling template
- IP 24 - full compliance with European standards for electrical safety and user protection

SAVINGS

- Accurate mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

ELECTRIC WATER HEATER

30 TO 150 L (VERTICAL WALL-MOUNTED)



Model available**



Intuitive control panel



Space-saving

MAGNESIUM ANODE


Tank protection



Dry ceramic heating element

*Depending on models - **Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

Steatite Cube

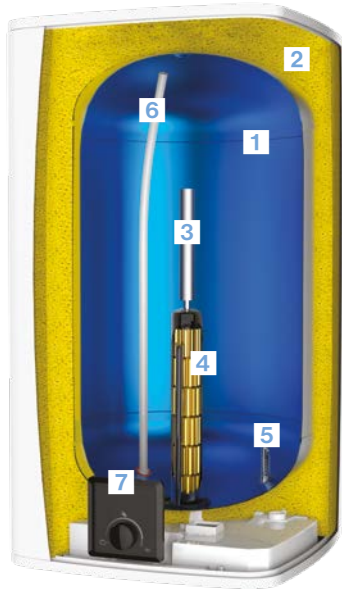


- 1 Diamond-quality enamel (glass-lined inner tank)
- 2 High-density polyurethane foam 0% CFC
- 3 Magnesium anode
- 4 Steatite dry heating element
- 5 Inlet diffuser
- 6 Optimised stainless steel outlet pipe
- 7 Control Panel



- 1 Manual mode
- 2 Absence mode (7°C)
- 3 Heating light indicator
- 4 Quick mode selection control knob

Thanks to the unique Steatite technology, the water heater is well adapted to aggressive, hard and desalinated water. Ceramic heating element is protected by enamelled steel sleeve, which grants a large heat exchange surface and reduces limescale deposits.

INSTALLATION DIMENSIONS

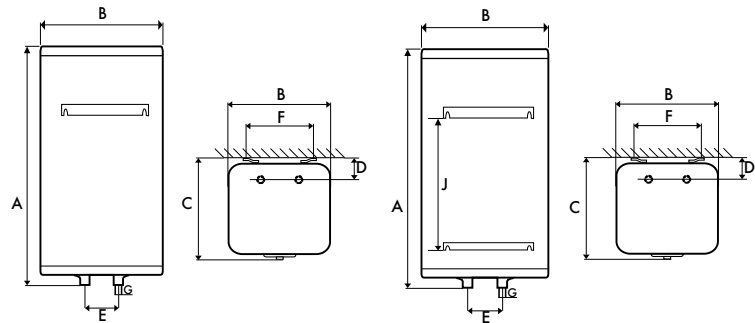

STEATITE CUBE 30, 50, 75 & 100 L

STEATITE CUBE 150 L

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	HEAT-UP TIME AT 60°C (ΔT=20°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)	ENERGY CONSUMPTION (kWh/24 h AT 65°C)
30	1500	230	0h30	1h16	0.63
50	1500	230	0h50	2h07	0.86
75	1500	230	1h15	3h12	0.91
100	1500	230	1h40	4h14	1.08
150	1500	230	2h30	6h24	1.56

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)								FLANGE OPENING (Ø) mm	NET WEIGHT (Kg)	ERP ENERGY CLASS	PROFILE
	A	B	C	D	E	F	G	J				
30	624	342	387	100	100	184	1/2"	-	76	14.5	B	S
50	909	342	387	100	100	184	1/2"	-	76	19.5	C	M
75	712	490	532	163	230	350/440	3/4"	-	76	26	C	L
100	883	490	532	163	230	350/440	3/4"	-	76	31	C	L
150	1203	490	532	163	230	350/440	3/4"	800	76	41.5	C	M