

PRODUCT CATEGORY: WATER HEATER

LAST UPDATE : 12/1/2022


REF.	DESCRIPTION	OUTPUT	VOLTAGE	FREQUENCY	EAN 13	SAP CODE
221081	THE RISTRETTO AS 010L 1600S PE	1600	230 V	50 Hz	3546332210818	100022108120
221082	THE RISTRETTO US 010L 2000S PE	2000	230 V	50 Hz	3546332210825	100022108220
221075	THE RISTRETTO AS 015L 2000S PE	2000	230 V	50 Hz	3546332210757	100022107520
221076	THE RISTRETTO US 015L 2000S PE	2000	230 V	50 Hz	3546332210764	100022107620
231021	THE RISTRETTO AS 030L 2000S PE	2000	230 V	50 Hz	3546332310211	100023102130
241038	THE RISTRETTO AS 050L 2000S PE	2000	231 V	50 Hz	3546332410386	100024103830

### KEY SELLING POINTS & PRODUCTS ADVANTAGES


Basic entry range round design benefiting from all Groupe Atlantic know-how on electric water heaters:

- User friendly heating light indicator
- Mechanical thermostat with integrated security
- Large range covering all capacities and installation types

	GENERAL SPECIFICATION
HEATING ELEMENT	IMMERSION
HEATING ELEMENT MATERIAL	COPPER
TANK PROTECTION 1	MAGNESIUM ANODE
TANK PROTECTION 2	O'PRO TECHNOLOGY
TANK MATERIAL	ENAMELED STEEL
EXTERNAL MATERIAL	PAINTED STEEL
INSTALLATION TYPE	HORIZONTAL WALL-MOUNTED
PRODUCT MAIN COLOR	WHITE
TOP COLOR	WHITE
BOTTOM COLOR	WHITE
HMI COLOR	-
TYPE OF INTERFACE	BOTTOM KNOB
THERMOSTAT	MECHANICAL ROD
SAFETY VALVE	8 BAR
DIELECTRIC UNION	YES
THERMOMETER	NO

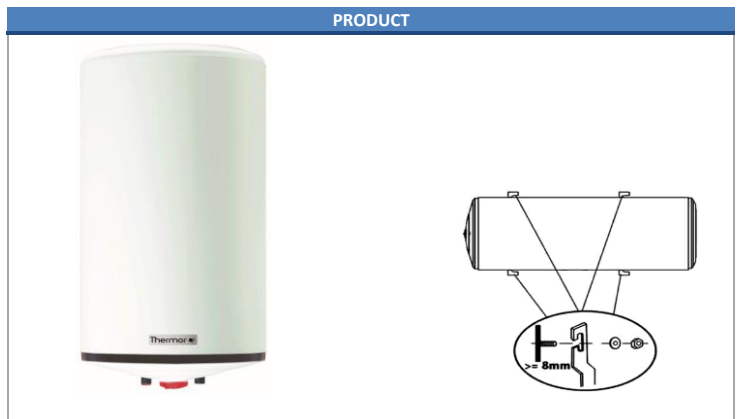

	FUNCTIONS
ON / OFF SWITCH	NO
POWER INDICATOR	NO
HEATING INDICATOR	YES
SHOWER READY INDICATOR	NO
TEMPERATURE SETTING	YES
TEMPERATURE DISPLAY	NO
MANUAL MODE	NO
SMART/ECO+ MODE	NO
ABSENCE MODE	NO
MAX MODE	NO
BOOST MODE	NO
CONNECTIVITY	NO
ERROR INDICATOR	NO



... TRANSLATED INTO :


Languages

FR / EN / ES / PT / IT / NL / PL / HU / BG / ET / RU / CS / HR / RO / LT / SL / LV / AR





ELECTRIC SUPPLY


CABLE	YES	PLUG TYPE	
ELCB	NO		E



... TRANSLATED INTO :

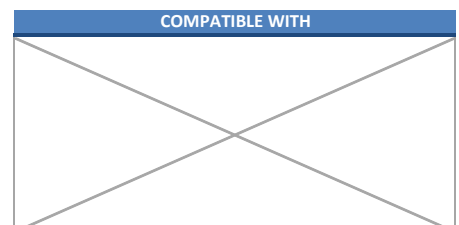

### INSTALLATION DIMENSIONS

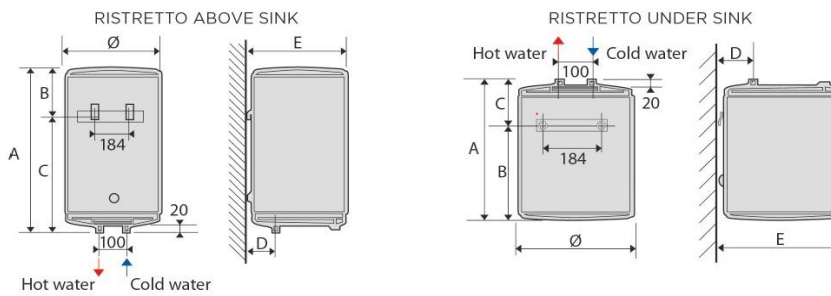

REF.	DESCRIPTION	TYPE	NET DIMENSIONS (cm)							WEIGHT (kg)	
			A	B	C	D	E	Ø	FLANGE OPENING	INLET/OUTLET CONNEXIONS	NET WEIGHT
221081	THE RISTRETTO AS 010L 1600S PE	Above sink	45.6	17.4	28.2	6.5	26.2	25.5	7.2	½"	6.5
221082	THE RISTRETTO US 010L 2000S PE	Under sink	45.6	23.5	22	6.5	26.2	25.5	7.2	½"	6.5
221075	THE RISTRETTO AS 015L 2000S PE	Above sink	40	16.8	23.2	8.3	34.7	33.8	7.2	½"	7.5
221076	THE RISTRETTO US 015L 2000S PE	Under sink	40	23.2	16.7	8.3	34.7	33.8	7.2	½"	7.5
231021	THE RISTRETTO AS 030L 2000S PE	Above sink	61.7	15	46.6	8.3	34.7	33.8	7.2	½"	11.5
241038	THE RISTRETTO AS 050L 2000S PE	Above sink	90.5	16.2	74.2	8.3	34.7	33.8	7.2	½"	14.5

REF.	DESCRIPTION	PACKED DIMENSIONS (cm)			WEIGHT (kg)	
		LENGTH	WIDTH	HEIGHT	GROSS WEIGHT	
221081	THE RISTRETTO AS 010L 1600S PE	29	29	52	7.5	
221082	THE RISTRETTO US 010L 2000S PE	29	29	52	7.5	
221075	THE RISTRETTO AS 015L 2000S PE	39	39	46	9.0	
221076	THE RISTRETTO US 015L 2000S PE	39	39	46	9.0	
231021	THE RISTRETTO AS 030L 2000S PE	39	39	66	12.6	
241038	THE RISTRETTO AS 050L 2000S PE	39	39	96	17.5	

#### INCLUDED ACCESSORIES 1

Wall mounting brackets




#### INCLUDED ACCESSORIES 2

Safety valve



#### COMPATIBLE ACCESSORIES

#### PACKAGING

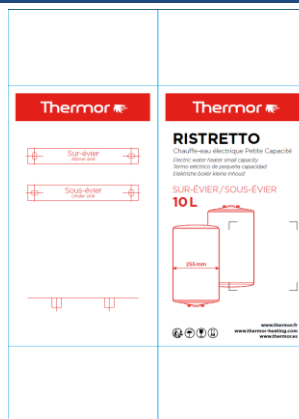

IP RATING

#### SAFETY

IP 24, IP25

#### STANDARDS

CE

#### SPECIFICATIONS

REF	CAPACITY	Heat up time (ΔT=50°C) (min)	Energy consumption (kWh/24h at 65°C)	ErP Energy class	Profile
221081	10L AS	24	0.48	A	XXS
221082	10L US	19	0.63	B	XXS
221075	15L AS	35	0.58	B	XXS
221076	15L US	28	0.66	B	XXS
231021	30L AS	57	0.76	C	S
241038	50L AS	96	1.13	C	M