
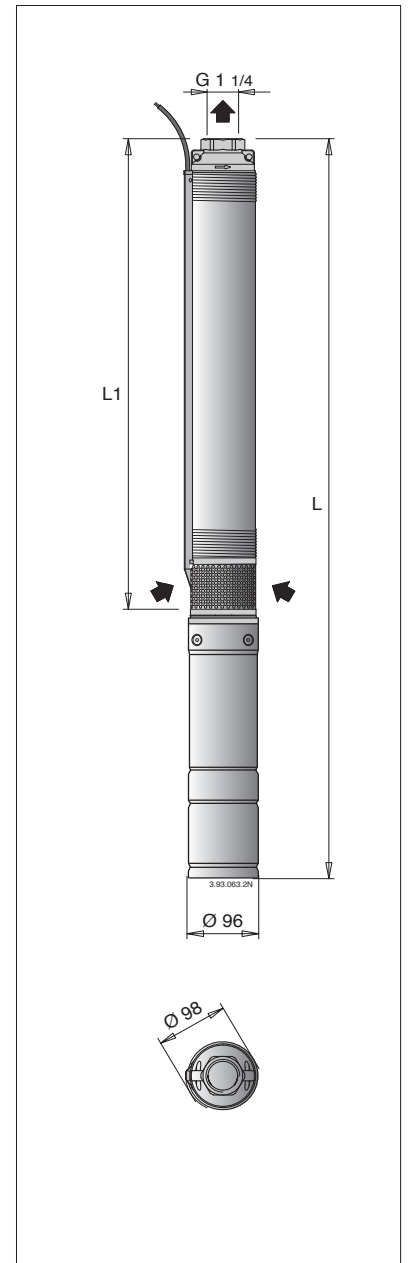


Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

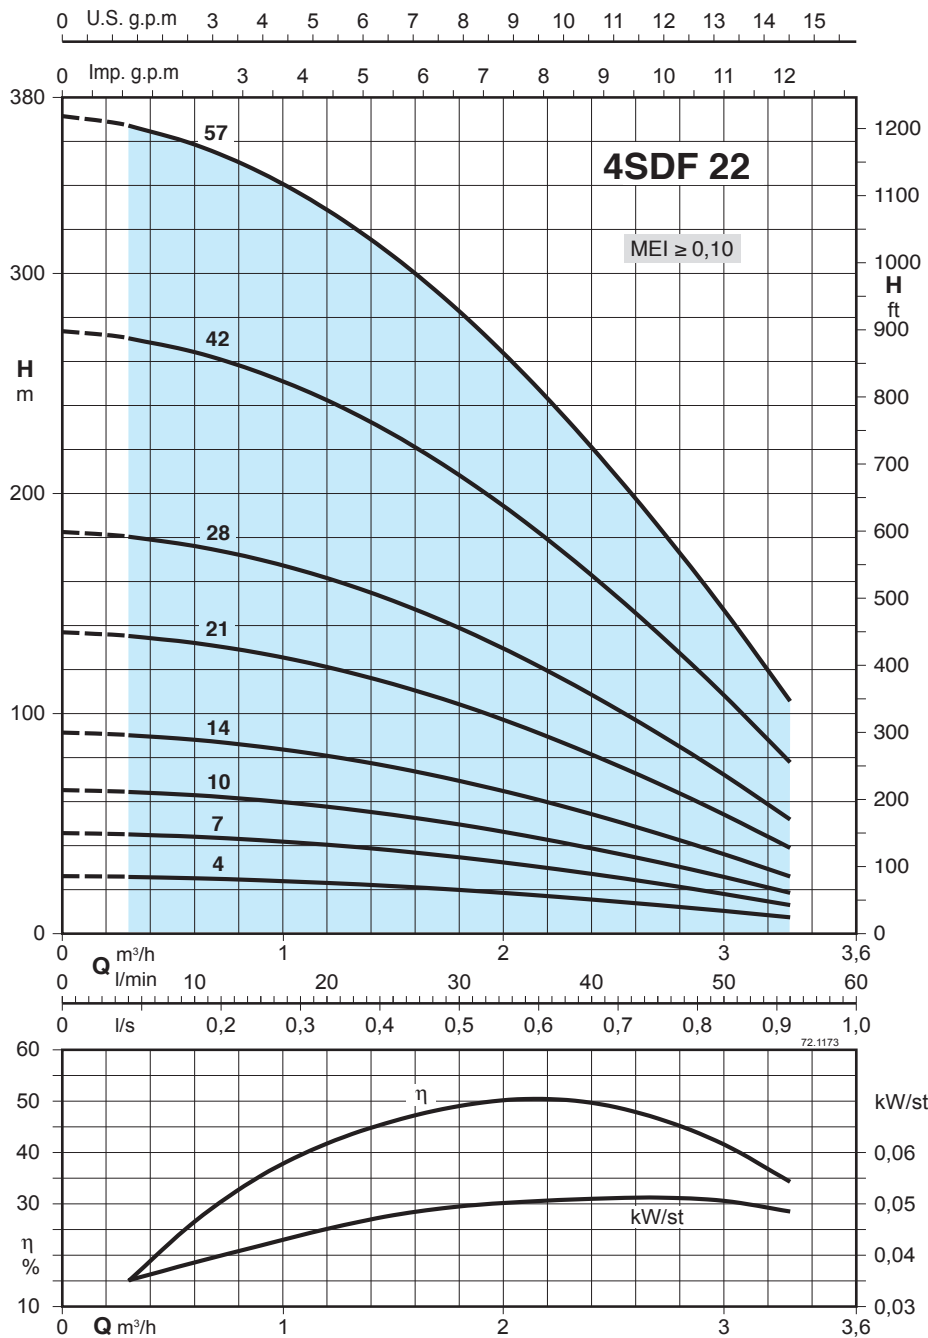

	3~ 400 V (380-415) 50 Hz	1~ 230V 450 Vc	P1 kW	P2 kW	P2 HP	Q m³/h l/min	n $\approx$ 2900 rpm											
							0	0,3	0,6	0,9	1,2	1,5	1,8	2,4	3	3,3		
							0	5	10	15	20	25	30	40	50	55		
4SDF 22/4EC	1,2	4SDFM 22/4EC	3,2	16	0,62	0,37	0,5											
4SDF 22/7EC	1,2	4SDFM 22/7EC	3,2	16	0,7	0,37	0,5											
4SDF 22/10EC	1,5	4SDFM 22/10EC	4	25	0,89	0,55	0,75											
4SDF 22/14EC	2	4SDFM 22/14EC	5,6	35	1,22	0,75	1											
4SDF 22/21EC	2,9	4SDFM 22/21EC	8,4	40	1,82	1,1	1,5											
4SDF 22/28EC	4,2	4SDFM 22/28EC	11,2	60	2,33	1,5	2											
4SDF 22/42EC	5,5	4SDFM 22/42EC	14,7	70	3,27	2,2	3											
4SDF 22/57EC	7,4					3	4											

L1 mm	4SDF		4SDFM	
	L mm	kg	L mm	kg
265	592	10,6	592	10,6
325	652	11,2	652	11,1
385	732	10,7	747	13,4
465	827	12,2	867	15,4
605	1007	14,7	1052	18,5
745	1192	17,4	1212	20,9
1015	1417	28,4	1532	25,8
1365	1846	33		